


# MC 100-508 Pluggable terminal block



Pitch: 5.08mm(0.200inch)




## SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 380V
負載電流	Rated Current	Bemessungsstrom	16A	16A
電線線徑	Wire Size	Leitergrößen	24~12AWG	0.2~4mm <sup>2</sup>
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
押線圈	Cage Clamp	Klemmkörper	Brass, Ni plated	
導電夾片	Contact	Kontakt	Phosphor bronze, Tin plated	
螺絲	Screw Size	Schraubengewinde	M3.0, steel, Zinc plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
扭力	Torque	Anzugsmoment	7.0 lb-inch	
UL File No.	E167040			

## TABLE

Item No.	A(mm)	A(inch)
MC100-50802	10.2	0.400
MC100-50803	15.2	0.600
MC100-50804	20.3	0.800
MC100-50805	25.4	1.000
MC100-50806	30.5	1.200
MC100-50807	35.6	1.400
MC100-50808	40.6	1.600
MC100-50809	45.7	1.800
MC100-50810	50.8	2.000
MC100-50811	55.9	2.200
MC100-50812	61.0	2.400
MC100-50813	66.0	2.600
MC100-50814	71.1	2.800
MC100-50815	76.2	3.000
MC100-50816	81.3	3.200
MC100-50817	86.4	3.400
MC100-50818	91.4	3.600
MC100-50819	96.5	3.800
MC100-50820	101.6	4.000
MC100-50821	106.7	4.200
MC100-50822	111.8	4.400
MC100-50823	116.8	4.600
MC100-50824	121.9	4.800

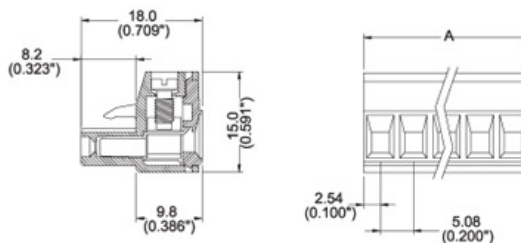

Note:  
Screw Plating: Changes are available upon request  
Cage Clamp: MC 100 # : Steel