



A range of sockets and accessories for 85 series timers

Features include:

- PCB, screw terminal, panel or 35 mm rail (EN 50022) mount versions
- Flammability in conformity with UL 94
- Approvals (according to type): BBJ, CSA, DEMKO, CS - IMQ, SEV, cULus



94.14



94.22



P.C.B. SOCKETS

TYPE 94.12 for types 85.32 - 85.52

TYPE 94.13 for types 85.33 - 85.53

TYPE 94.14 for types 85.34 - 85.54

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Sn 6 tin plated

PANEL MOUNT SOLDER SOCKETS (1 mm thick panel mount)





TYPE 94.22 for types 85.32 - 85.52

TYPE 94.23 for types 85.33 - 85.53

TYPE 94.24 for types 85.34 - 85.54

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- MATERIAL: polycarbonate (PC)
- CONNECTIONS: Cu Sn 6 silver plated

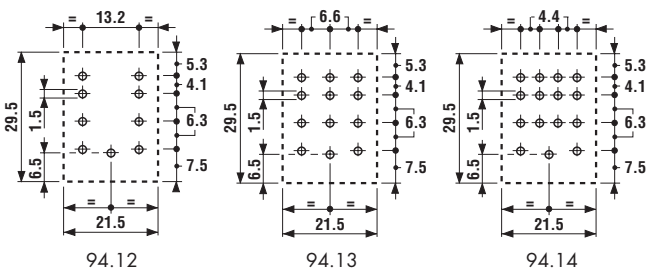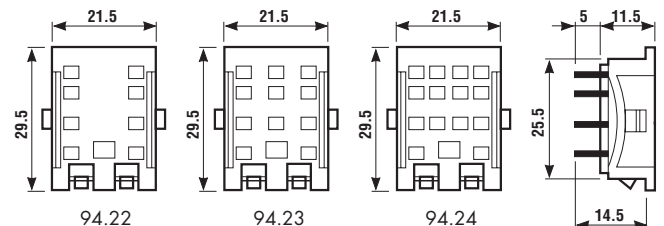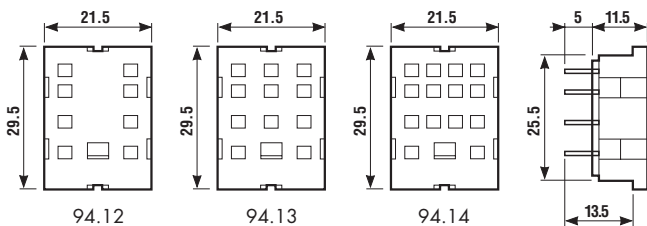



94.34



94.64



PANEL MOUNT SOLDER SOCKETS (M3 screw mount)

TYPE 94.32 for types 85.32 - 85.52

TYPE 94.33 for types 85.33 - 85.53

TYPE 94.34 for types 85.34 - 85.54

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Sn 6 tin plated

CLAMP TERMINALS SOCKETS

(panel or 35 mm rail - EN 50022- mount)



TYPE 94.62 for types 85.32 - 85.52

TYPE 94.64 for types 85.34 - 85.54

Accessories: **TYPE 094.81** retaining clip

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3$ M Ω
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

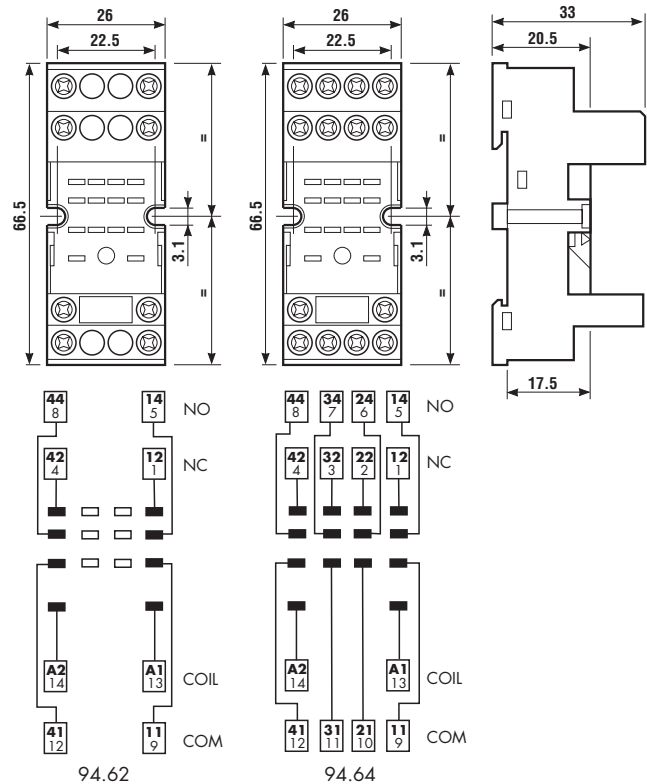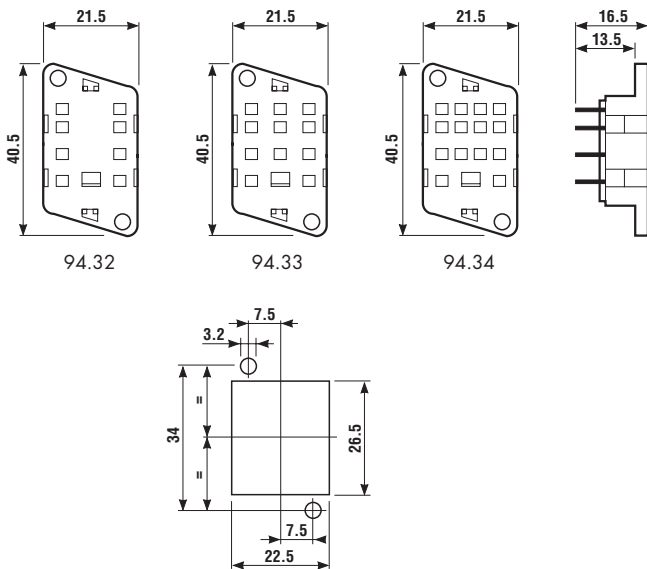



94.74



94.82



SCREW TERMINALS SOCKETS (panel or 35 mm rail - EN 50022- mount)

TYPE 94.73 for types 85.32 - 85.52

TYPE 94.74 for types 85.34 - 85.54

Accessories: **TYPE 094.81** retaining clip

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.



SCREW TERMINALS SOCKETS (panel or 35 mm rail - EN 50022- mount)

TYPE 94.82 for types 85.32 - 85.52


Accessories: **TYPE 094.81** retaining clip

CHARACTERISTICS



- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PPEm (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

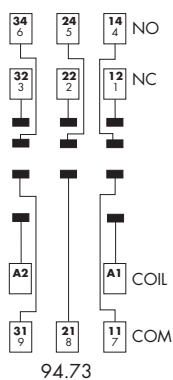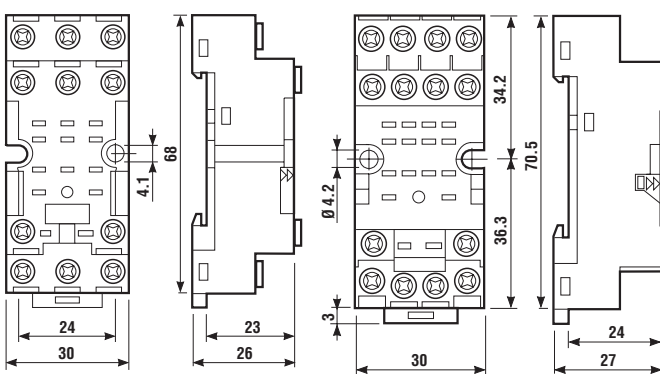

94.73

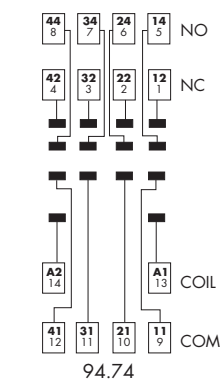

94.74

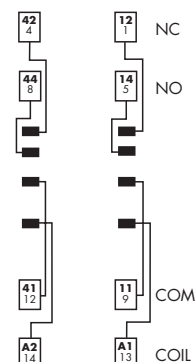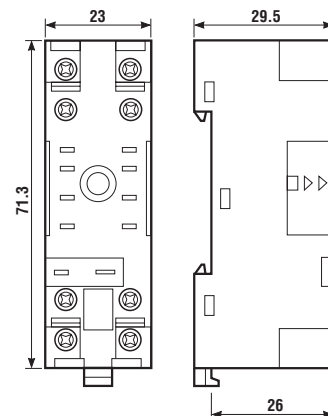



94.04



094.06



CLAMP TERMINALS SOCKETS (panel or 35 mm rail - EN 50022- mount)

TYPE 94.02 for types 85.32 - 85.52

TYPE 94.04 for types 85.34 - 85.54

Accessories: **TYPE 094.81** retaining clip

TYPE 094.06 6-way jumper link

CHARACTERISTICS

- LOAD: 10 A 250 V
- ISOLATION RESISTANCE: $\geq 10^3 \text{ M}\Omega$
- DIELECTRIC STRENGTH: $\geq 2 \text{ kV AC}$
- MATERIAL: self-extinguishing PA 6 20% FV (V1)
- CONNECTIONS: Cu Zn 33 nickel plated
- PROTECTION CATEGORY: IP 20
- Non removable pozidrive slotted terminal screws.
- Identification label.

6-WAY JUMPER LINK

TYPE 094.06 for socket 94.02 and 94.04

CHARACTERISTICS

- LOAD: 10 A 250 V

