



HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0
fax: +49 (0) 6402/808-60
email: info@hahn-trafo.de


Data sheet: BV EI 303 2039

| | | | |
|--------------------------|--------|---------|---------------|
| Size 3 a: height 24.0 mm | 1,9 VA | ta 70/F | BV EI 303 ... |
|--------------------------|--------|---------|---------------|



Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

| | |
|---|---|
| absolutely short-circuit-proof |  |
| minimal size | |
| test certifications to ENEC 10-, VDE, UL- and CSA-regulations | |
| vaccum encapsulated, bobbin with dual chamber windings | |
| temperature class ta 40°C/F and ta 70°C/F | |
| hight electrical safety and long service-life properties | |
| individually tested with certificate | |
| excellent temperature fluctuation resistance properties | |
| self-extinguishing cast housing and sealing material | |

| Article no. BV | Output ta 40°C/F | prim. V | Connecting pins | Operating point sec. ± 5% | Connecting pins | No-load voltage V ± 5% |
|----------------|------------------|---------|-----------------|---------------------------|-----------------|------------------------|
| BV EI 303 2039 | 1,9 | 230 | 1-5 | 2x18 V 52 mA | 6-7/9-10 | 26,5/26,5 |

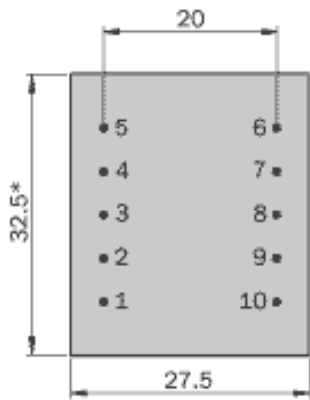

Ansicht auf die Stifte

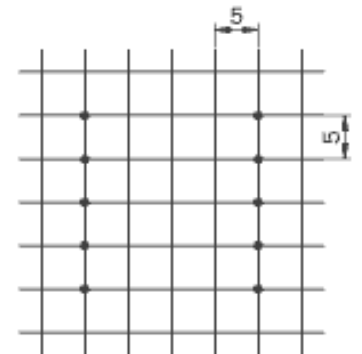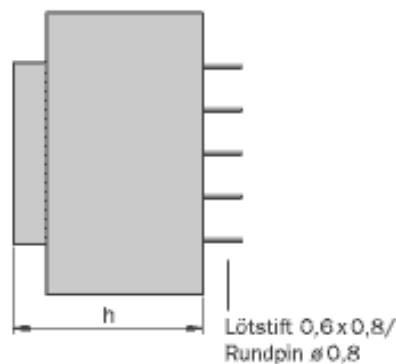

Maße ohne Toleranzangabe ± 0,3 mm, Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.