Cable ties

HP−FIXIT® High−Quality−Standard cable ties

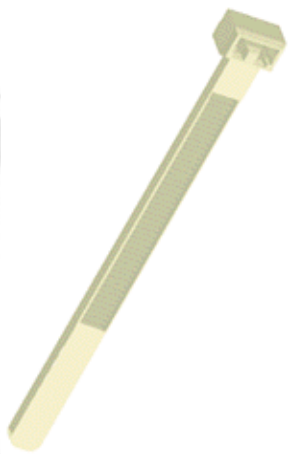

Material: polyamide 6.6 nature / black (UV resistant) acc. to ***UL 94 V−2***
Temperature resistance: −40ºC up to +80ºC
Melting point: +250ºC
Resistant against: oil, petrol, seawater, solvents, mold, dilated light organic acids and alkalis.

Width and length can be marginally different from catalogue.

free of halogen

Item Number	**06050**
Cable Ties	with UL−approval:
Colour	nature
Length [mm]	200,00
Width [mm]	2,50
max. Bundle−Ø [mm]	52,00
Tensile Strength [KP]	8,2
Tensile Strength [N]	80,00

HILPRESS®	Hilpress GmbH Grützmühlenweg 40 D−22339 Hamburg Web: www.hilpress.com eMail: export@hilpress.de	Date: 17.04.2015