


**HIL-BOX® enclosure system
including diaphragms, screwed cover**

shock resistant enclosures including **moulded glands** in soft material. Cover fixed by stainless steel screws.

protection spec.: IP 65 acc. DIN EN 60529
 material: base and lid ABS (UV resistant, halogen free), membrane entry rubber
 installation temp.: -5°C up to +60°C acc. DIN EN 60670
 temperature resistance: max. 70°C acc. DIN EN 60695-10-2
 flame protection: 650°C acc. DIN EN 60695-2-11

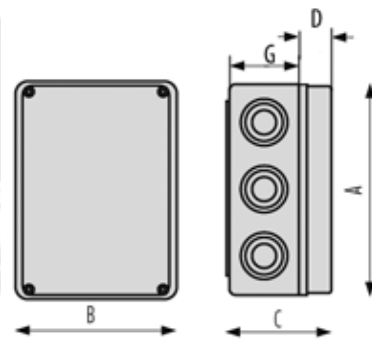

Item Number	55260
HIL-BOX® enclosure system	
A [mm]	190,00
B [mm]	145,00
C [mm]	70,00
G [mm]	55,00
D [mm]	25,00
Ø membranes	37,00
membranes	10,00



Hilpress GmbH
 Grützmühlenweg 40
 D-22339 Hamburg
 Web: www.hilpress.com
 eMail: export@hilpress.de

Date:
 29.01.2016