


**HIL-BOX® enclosure system  
including stepped entry seals, nylon-hinged screws**

Shock resistant enclosures including **universal entry seals in soft material with different stepped diameters**. Cover fixed with nylon-screws. The unscrewing of the nylon screws allows to open the lid in 2 directions depending on the used screws. The screws are used as hinge and allow a fast opening of the enclosure.

protection spec.: IP 55 acc. DIN EN 60529  
 material: base and lid ABS (UV resistant),  
 entry seals PVC, screws PA  
 colour: grey RAL 7035  
 installation temp.: -5°C up to +60°C acc. DIN  
 EN 60670  
 temperature resistance: max. 70°C acc. DIN  
 EN 60695-10-2  
 flame protection: 650°C acc. DIN EN  
 60695-2-11

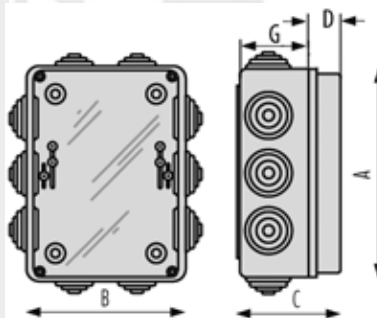

Item Number	<b>55420</b>
HIL-BOX® enclosure system, universal entry seals in soft material with different stepped diameters	
A [mm]	300,00
B [mm]	220,00
C [mm]	120,00
G [mm]	80,00
D [mm]	50,00
Ø diameter nipples	14 – 32
nipples	12,00

	Hilpress GmbH Grützmühlenweg 40 D-22339 Hamburg Web: <a href="http://www.hilpress.com">www.hilpress.com</a> eMail: <a href="mailto:export@hilpress.de">export@hilpress.de</a>	Date: 29.01.2016
---	--	---------------------