


**HIL-BOX® enclosure system
with smooth walls, nylon-hinged screws**

plain sided shock resistant enclosures with **cover fixed by nylon-screws**. The unscrewing of the nylon screws allows to open the lid in 2 directions depending on the used screws. The screws are used as hinge and allow a fast opening of the enclosure.

protection spec.: IP 65 acc. DIN EN 60529
 material: base and lid ABS (UV resistant),
 transparent lid PC, screws PA
 colour: grey RAL 7035
 installation temp.: -5°C up to +60°C acc. DIN EN 60670
 temperature resistance: max. 70°C acc. DIN EN 60695-10-2
 flame protection: 650°C acc. DIN EN 60695-2-11

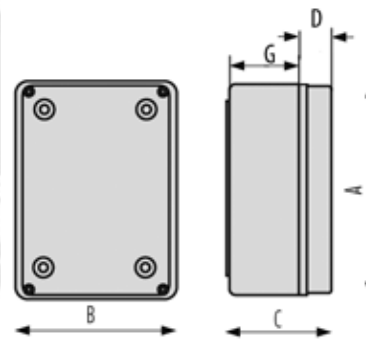

Item Number	55540
HIL-BOX® enclosure system, cover grey	
A [mm]	460,00
B [mm]	380,00
C [mm]	120,00
G [mm]	80,00
D [mm]	50,00

	Hilpress GmbH Grützmühlenweg 40 D-22339 Hamburg	
--	---	--