Data Sheet

Customer:

Product: Aluminum Electrolytic Capacitors – EXR Series

Size : 5x11mm ~ 18x41mm

Issued Date: 25-May.-2016

Edition: Ver. 1

Record of change

Date	Ver.	Description	Page
25-May-2016	1		
23-Apr-2018	2	Load life 100V:2000hrs	1

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,
New Taipei City, TAIWAN, R.O.C.
Tel: +886 2 2299 1331 (Rep.)
Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
25-May-2016	25-May-2016	25-May-2016	
Andy Hsu	***Hwa Wu***	***Hwa Wu***	

HITANO ENTERPRISE CORP. ®

EXR SERIES

- EXR series capacitors are ideal for use in switching power supplies, communication equipments and etc.
- Low Impedance and long life.
- Safety vent construction design.
- RoHS Compliant

Characteristics

Voltage Range	6.3 to 100 VDC					160 to 450 VDC			
Capacitance Range	4.7 to 15000uF					1 to 470uF			
Temperature Range	-40 to +105℃					-25 to +105℃			
Leakage Current	I≦0.01CV or 2uA, whichever is greater 3 minutes after Rated Voltage applied					I≦0.03CV 3 minutes after Rated Voltage applied			
Capacitance Tolerance	±20% at 120Hz , 20℃(10% Tol. is available upon request)								
Dissipation Factor (at 20℃, 120Hz)	Working Voltage (V)	6.3	10	16	25	35	50	63	100
	tanδ(%) max	18	16	14	12	10	9	8	8
	Working Voltage (V)	160	200	250	350	400	450		
	tanδ(%) max	12	12	12	15	15	17		
	For capacitance > 1000uF, add 0.02 for every 1000uF								
Low Temperature Characteristics (120Hz)	Working Voltage (V)	6.3	10	16	25	35	50	63	100
	Z-25℃/Z +20℃	4	3	3	3	3	3	2	2
	Z-40℃/Z +20℃	8	6	4	3	3	3	3	3
	Working Voltage (V)	160	200	250	350	400	450		
	Z-25℃/Z +20℃	2	2	3	5	5	6		
	Z-40℃/Z +20℃	3	6	6	6	6	-		
	For capacitance > 1000uF, add 0.5 every 1000uF for -25℃/+20℃ add 1.0 every 1000uF for -40℃/+20℃								
Load Life : **D ϕ** / **Life Hours** **5 – 6.3 ϕ** / **2000** **8 ϕ** / **3000** **≧ 10 ϕ** / **5000**	After the rated voltage with ripple current has been applied for at 105℃ **(100V～450V : 2000HRS)**	Capacitance change	Within ±20% of initial value						
		D.F. tanδ	200% or less of initial specified value						
		Leakage current	Less than initial specified value						
Shelf life (at 105℃)	After storage for 1000 hours at 105℃ with no voltage applied, the capacitor shall meet the specified limit in load life. Pre-treatment for measurement shall be conducted after application of DC working voltage for 30 minutes.								

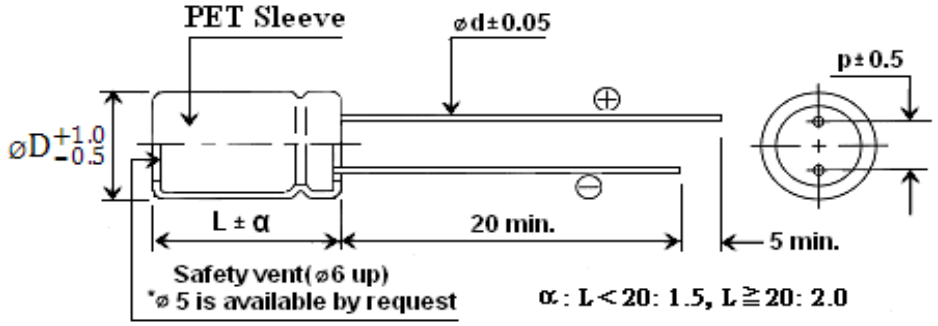

Drawing

Dϕ	5	6.3	8	10	13	16	18
p	2.0	2.5	3.5	5.0	5.0	7.5	7.5
dϕ	0.5	0.5	0.5	0.6	0.6	0.8	0.8

Ripple Current Coefficients

Frequency (Hz)	50(60)	120	400	1K	10K	100K
Cap.(uF) / Hz	Multiplier					
Cap. ≦ 10	0.47	0.59	0.76	0.85	0.97	1
10＜Cap.≦100	0.52	0.62	0.80	0.89	0.97	1
100＜Cap.≦1000	0.58	0.72	0.84	0.90	0.98	1
1000＜Cap.	0.63	0.78	0.87	0.91	0.98	1

HITANO
ENTERPRISE CORP. ®

EXR SERIES

Case size & Maximum Ripple Current (mA rms 105℃ 100KHz) & Imp. (Ω 20℃ 100KHz)

WV / Cap	6.3			10			16			25		
uF	Size	Imp	RC	Size	Imp	RC	Size	Imp	RC	Size	Imp	RC
10							5x11	4.70	74	5x11	2.56	85
22							5x11	2.60	100	5x11	1.95	115
33							5x11	2.00	114	5x11	1.42	155
47							5x11	1.10	155	5x11	1.10	155
68							5x11	0.69	195	6.3x11	0.65	230
100				5x11	0.80	210	6.3x11	0.50	265	6.3x11	0.35	370
150				6.3x11	0.61	290	8x12	0.41	370	8x12	0.31	390
220	6.3x11	0.65	310	6.3X11	0.35	340	8x12	0.25	450	8x12	0.15	555
330	8x12	0.42	390	8x12	0.27	460	8x12	0.15	590	8x14	0.12	700
470	8x12	0.25	450	8x12	0.25	580	10x12.5	0.12	750	10x16	0.076	1010
680	8x14	0.21	550	8x14	0.11	765	10x16	0.080	850	10x21	0.065	1220
1000	8x12 10x12.5	0.17 0.10	555 750	10x12.5 10x21	0.080 0.076	805 1040	10x21	0.068	1200	13x21	0.045	1650
1500	8x16 10x16	0.14 0.08	830 940	10x16 10x21	0.070 0.062	1000 1260	13x21	0.045	1575	13x26	0.038	1960
2200	10x21	0.068	1050	10x21	0.052	1260	13x21	0.039	1900	16x26	0.036	2100
3300	10x21 13x21	0.052 0.060	1260 1650	13x21	0.039	1660	16x26	0.030	1950	16x31.5	0.026	2680
4700	13x21	0.039	1900	13x26	0.030	1950	16x31.5	0.022	2410	18x36	0.018	2960
6800	16x26	0.032	2350	16x26	0.022	2150	16x36	0.018	2400	18x41	0.015	3550
10000	16x31.5	0.024	2700	16x31.5	0.018	2400	18x36	0.015	2800			
15000	18x36	0.023	2950									

WV / Cap.	35			50			63			100		
uF	Size	Imp	RC	Size	Imp	RC	Size	Imp	RC	Size	Imp	RC
4.7				5x11	2.00	90	5x11	2.00	65	5x11	2.60	72
10	5x11	2.2	107	5x11	1.82	120	5x11	1.75	110	6.3x11	1.77	130
22	5x11	1.5	150	6.3x11	1.25	150	6.3x11	0.80	240	8x12	0.85	220
33	5x11	1.21	180	6.3x11	0.80	250	6.3x11	0.61	270	10x12.5 10x16	0.70 0.69	293 320
47	6.3x11	0.80	250	6.3x11	0.65	290	8x12	0.56	300	10x12.5 10x16	0.58 0.37	370 382
68	6.3x11	0.64	280	8x12	0.33	375	10x12.5	0.21	480	10x16 10x21	0.35 0.28	470 501
100	8x12	0.25	450	10x12.5	0.17	480	10x16	0.14	530	13x21	0.18	714
150	8x12	0.191	510	10x12.5	0.132	560	10x16	0.11	600	13x21	0.174	780
220	10x16	0.114	750	10x16	0.096	630	10x21	0.08	710	13x26 16x26	0.13 0.10	950 1282
330	10x16	0.079	1050	10x21	0.078	960	13x21	0.055	1250	16x26 16x31.5	0.10 0.09	1440 1563
470	10x21	0.065	1200	13x21	0.055	1400	13x26	0.053	1620	16x31.5 18x32	0.09 0.076	1650 1907
680	13x21	0.056	1570	13x26	0.044	1830	16x26	0.043	1950	18x36	0.08	1790
820	13x21	0.048	1700	13x30	0.039	2100	16x26	0.038	2150	18x36	0.071	1840
1000	13x26	0.042	1900	16x26	0.036	2300	16x31.5	0.034	2350	18x41	0.066	1930
1500	16x26	0.026	2490	16x31.5	0.034	2650	18x36	0.031	2710			
2200	16x31.5	0.022	2550	18x36	0.032	3070	18x41	0.024	3600			
3300	16x36	0.016	2650	18x41	0.025	3100						
4700	18x41	0.010	3000									

HITANO
ENTERPRISE CORP. ®

EXR SERIES

Case size & Maximum Ripple Current (mA rms 105℃ 100KHz)

WV / Cap	160		200		250		350		400		450	
uF	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC
1	6.3x11	45	6.3x11	45	6.3x11	50	8x12	58	8x12	36	8x12	45
2.2	6.3x11	55	6.3x11	55	8x12	72	8x12 10x12.5	75 86	8x12 10x12.5	65 76	10x16	65
3.3	8x12	70	8x12	71	8x12	75	8x12 10x12.5	75 90	8x12 10x12.5	86 105	10x16	89
4.7	8x12	72	8x12 10x12.5	78 85	8x12 10x12.5	85 100	10x16 10x21	118 130	8x12 10x12.5	89 105	10x21 13x21	105 110
10	10x12.5 10x16	120 140	8x12 10x16	115 150	10x12.5 10x16	144 160	10x16 13x21	165 200	10x21 13x21	213 235	13x21 13x26	180 189
22	10x16 10x21	185 205	10x16 10x21	185 205	10x16 10x21	190 210	13x21	220	13x21 13x26	268 295	13x26	320
33	10x21 13x21	205 260	10x21 13x21	280 330	10x21 13x21	224 310	13x21 13x26	263 290	13x26 16x26	399 440	16x26	460
47	10x21 13x21	276 320	13x21 13x26	360 400	13x21 13x26	375 405	16x26 16x26	389 430	16x26 16x31.5	539 580	16x36	650
68	13x26	450	13x26 16x26	480 540	16x26	490	16x31.5	475	18x25 18x32	774 800	18x36	760
100	16x26	540	16x31.5	820	16x31.5	675	18x31.5 18x36	487 513	18x36 18x41	854 900	18x36 18x41	825 880
150	16x31.5	710	16x36	860	16x36	750	18x41	590				
220	16x36	820	18x36 18x41	1050 1090	18x36 18x41	850 910						
330	18x41	1180										

Part Numbering System

EXR	101	M	25	A	–	T1
SERIES	CAPACITANCE	TOL.	W.V.	PACKAGE	SIZE	LEAD SPACE
	IN 3DIGITS	M= ± 20%	0J= 6.3V	B= Bulk	Omit if only	Omit if Bulk
	010= 1.0uF		10= 10V	C5= Cut 5mm	one size	T1= L/S 2.5mm Taped
	4R7= 4.7 uF		16= 16V	AC5= Smaller Size cut 5mm	A= Smaller Size	TA= Lead forming space 5mm Taped
	101= 100uF		25= 25V			
	102= 1000uF		35= 35V	A= Ammo Pack		T35= L/S 3.5mm Taped
			50= 50V	R= Tape&Reel		T2=L/S 5mm Taped
			63= 63V	F5= Lead formed & cut 5mm		T3= L/S 7.5mm Taped
			2A= 100V			
			2C= 160V			
			2D= 200V			
			2E= 250V			
			2V= 350V			
			2G= 400V			
			2W= 450V			